


- 1. Connect to the modem via Wire or Wireless
- 2. Open a browser (Chrome, Firefox, Safari, etc) and enter 192.168.1.1 in the address bar, press ENTER
- 3. Enter admin as both the username and password if prompted
- 4. Click the Advanced tab on the top of the screen

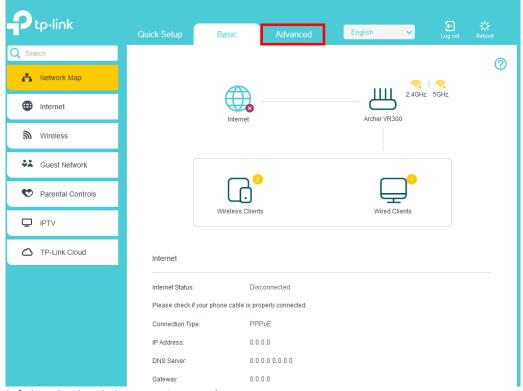

- 5. On the left-hand side, click **Operation Mode**
- 6. Make sure Wireless Modem Router Mode is selected and then click Save

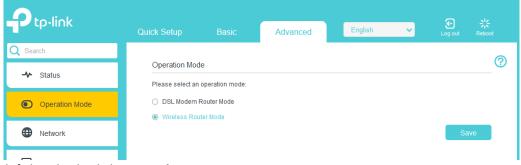

- 7. On the left-hand side click Network > Internet
- 8. Click the **Delete All** button, click **Yes** and then the **Add** button

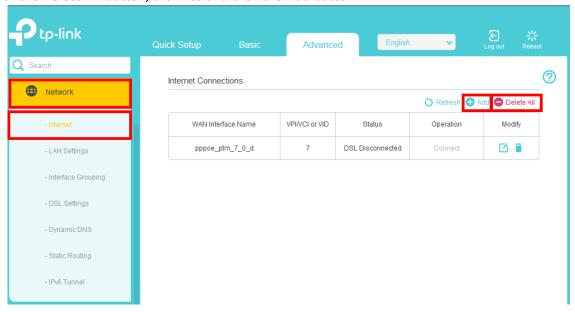

9. Match the below settings and click **Save**

Ethernet Configuration

VLAN ID:	☑ Enable
VLAN ID:	10
Internet Connection Type:	Dynamic IP
IPv4:	✓ Enable
IP Address:	0.0.0.0
Subnet Mask:	0.0.0.0
Gateway:	0.0.0.0
Default Gateway:	Current connection The state of the state
IPv6:	☐ Enable
Advanced	
MTU Size:	bytes.(The default is 1500, do not change unless necessary.)
NAT:	✓ Enable
Full-cone NAT:	✓ Enable
IGMP Proxy:	☐ Enable
Get IP Using Unicast DHCP:	(It is usually not required.)
Use the Following DNS Addresses: Enable	
Primary DNS:	1 . 1 . 1 . 1
Secondary DNS:	1 . 0 . 0 . 1
Host Name:	Archer_VR300