




1. Connect to the modem via Wire or Wireless
2. Open a browser (Chrome, Firefox, Safari, etc) and enter **192.168.1.1** in the address bar, press ENTER
3. Enter **admin** as both the username and password if prompted
4. Click the **Advanced** tab on the top of the screen

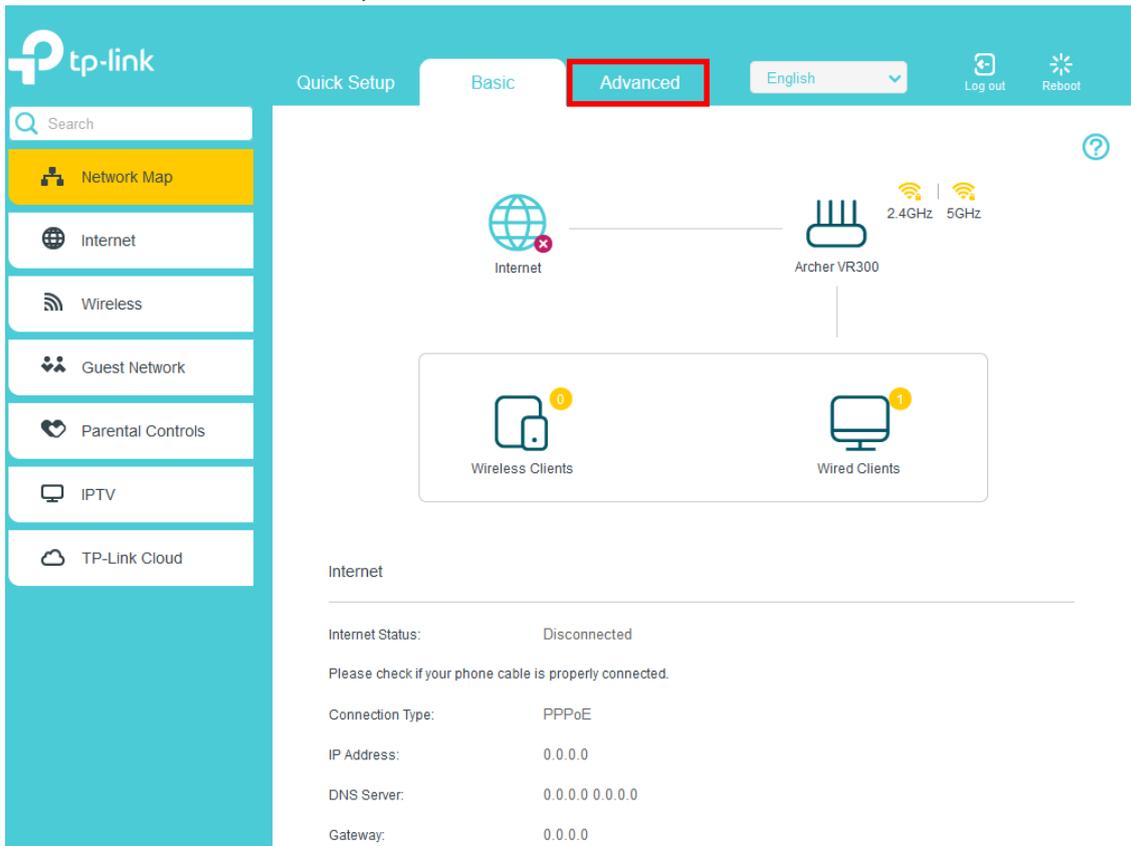

5. On the left-hand side, click **Operation Mode**
6. Make sure **DSL Modem Router Mode** is selected and then click **Save**

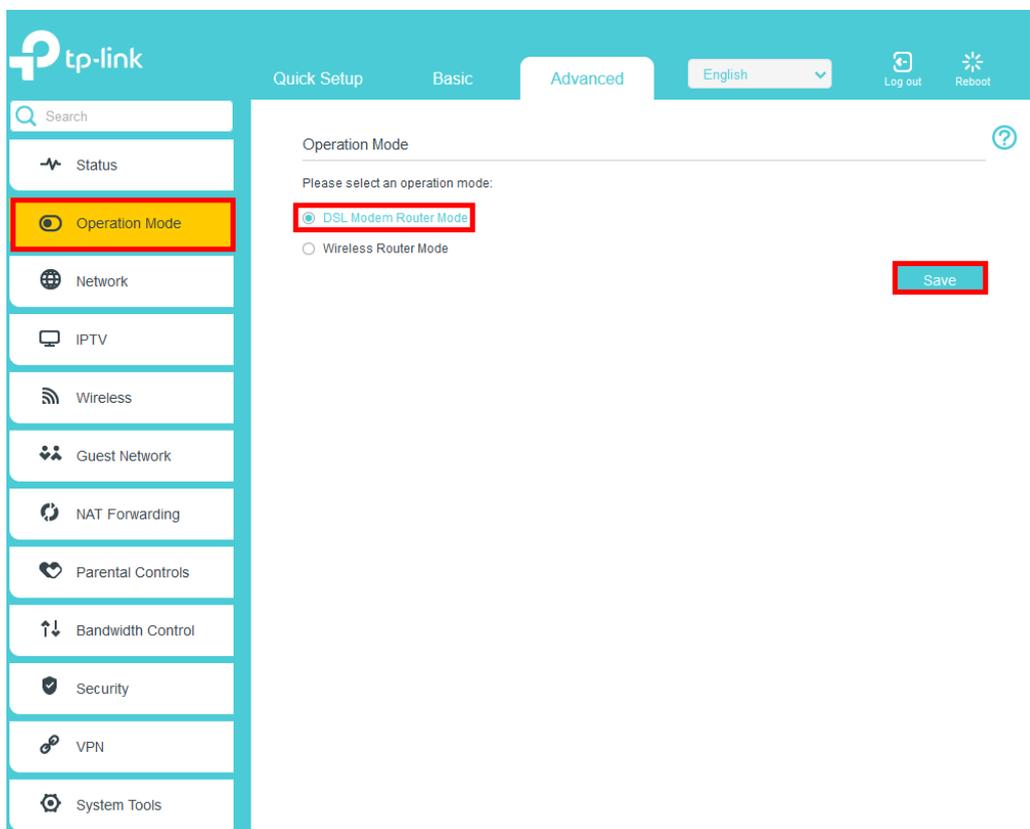

- On the left-hand side click **Network > Internet**
- Click the **Delete All** button, click **Yes** and then the **Add** button

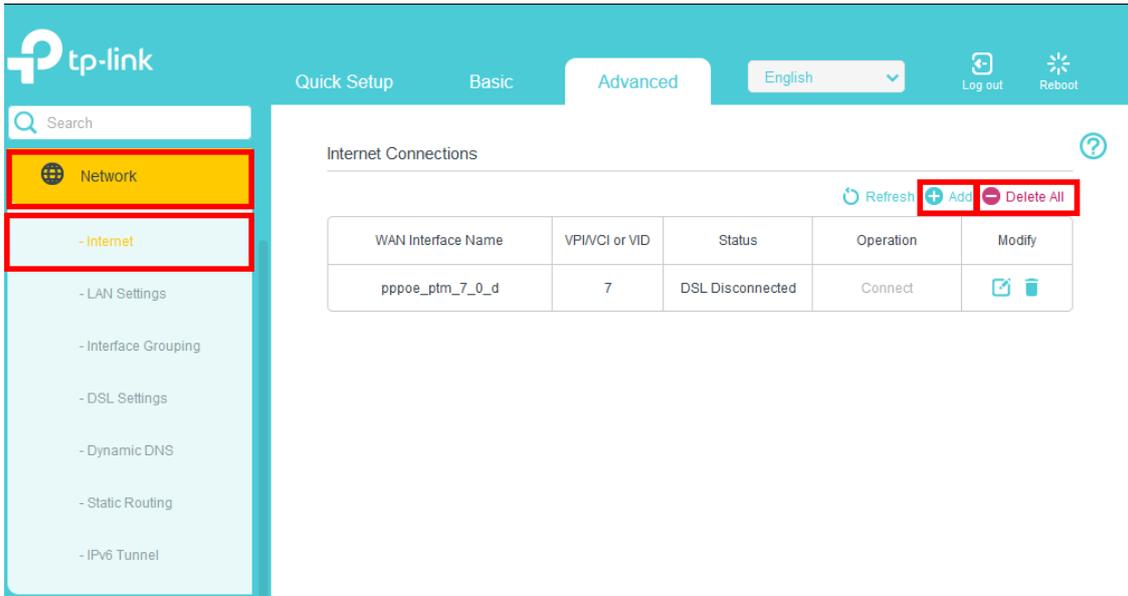

- Match the below settings

**Internet Connection Setup**

DSL Modulation Type:  VDSL  ADSL

VLAN ID:  Enable

VLAN ID (1-4094):

Internet Connection Type:

Username:

Password:

Confirm Password:

Connection Mode:  Auto  On Demand  Manually

Authentication Type:

IPv4:  Enable

Default Gateway:

IPv6:  Enable

**Advanced**

Service Name:  Do not change unless necessary.

Access Concentrator Name:  Do not change unless necessary.

MTU Size:  bytes. (The default is 1480. do not change unless necessary.)

NAT:  Enable

Full-cone NAT:  Enable

IGMP Proxy:  Enable

Use the IP Specified by ISP:  Enable

Echo Request Interval:  seconds. (0-120. The default value is 30.)

Use the Following DNS Addresses:  Enable

**MAC Clone**

Do NOT Clone MAC Address

Clone Current Computer MAC Address

Use Custom MAC Address

- Click **Save**