




1. Connect your device to the modem via WI-FI or by using an Ethernet cable.
2. Enter 192.168.20.1 into the address bar of your preferred internet browser, you will get prompted to input your username and password. The Username and password are always set to admin by default.
3. Select Basic setup.

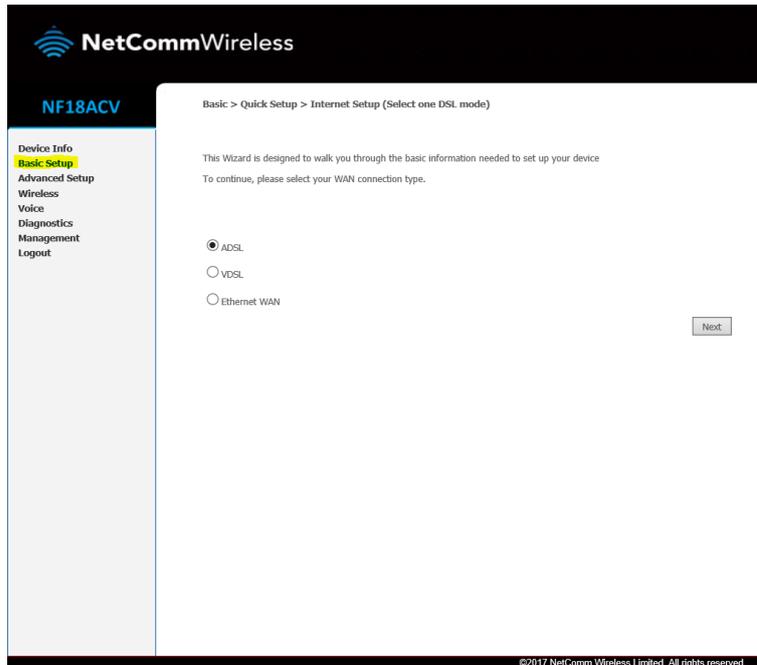

4. Select ADSL, then click next.

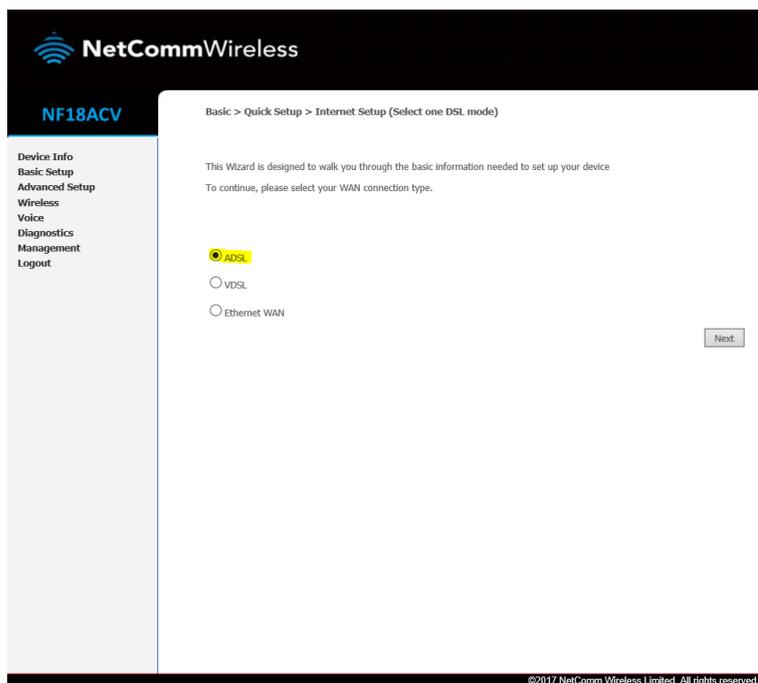

5. Select PPP over Ethernet (PPPoE), then click next.

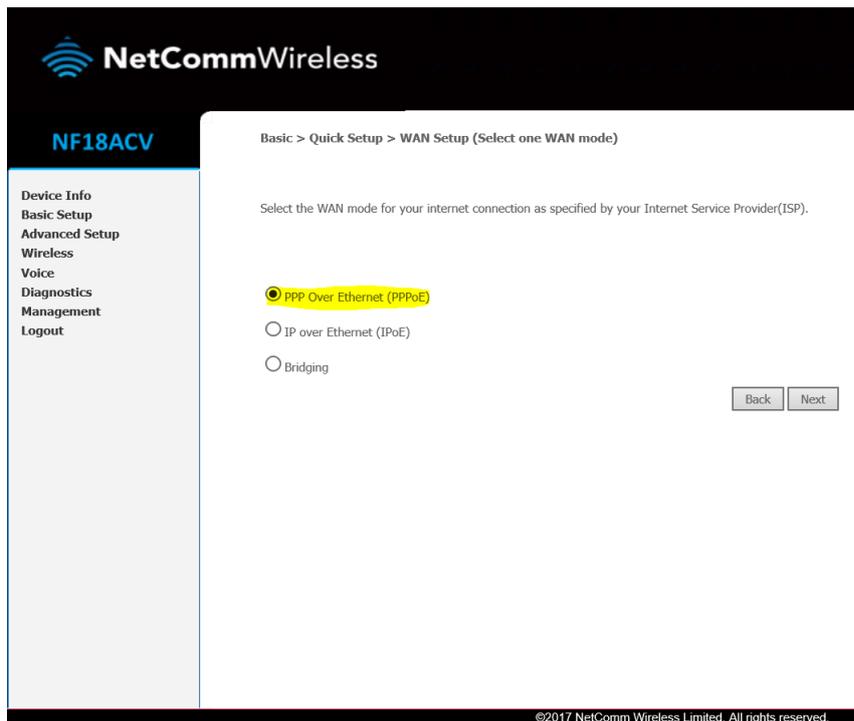


The screenshot shows the NetCommWireless web interface. The header includes the NetCommWireless logo and the device model NF18ACV. A left-hand navigation menu lists: Device Info, Basic Setup, Advanced Setup, Wireless, Voice, Diagnostics, Management, and Logout. The main content area is titled "Basic > Quick Setup > WAN Setup (Select one WAN mode)". Below this, it says "Select the WAN mode for your internet connection as specified by your Internet Service Provider(ISP)". There are three radio button options: "PPP Over Ethernet (PPPoE)" (which is selected and highlighted in yellow), "IP over Ethernet (IPoE)", and "Bridging". At the bottom right of the options are "Back" and "Next" buttons. A copyright notice "©2017 NetComm Wireless Limited. All rights reserved." is at the bottom.

6. Fill out the User ID & Password with the information below.
(The User ID & Password are case sensitive!)

User ID: user@contact.co.nz

Password: cOnt4ct-3n3rgy!

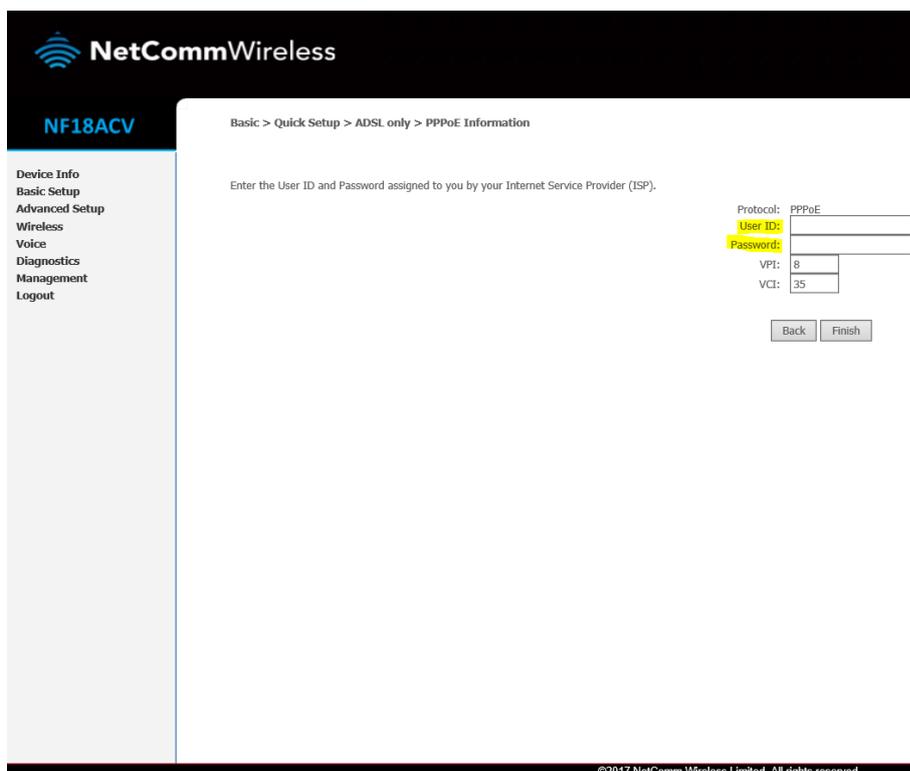

The screenshot shows the NetCommWireless web interface for the "Basic > Quick Setup > ADSL only > PPPoE Information" step. The left-hand navigation menu is the same as in the previous screenshot. The main content area says "Enter the User ID and Password assigned to you by your Internet Service Provider (ISP)". On the right, there are input fields for "Protocol: PPPoE", "User ID:", "Password:", "VPI: 8", and "VCI: 35". The "User ID:" and "Password:" labels are highlighted in yellow. At the bottom right are "Back" and "Finish" buttons. A copyright notice "©2017 NetComm Wireless Limited. All rights reserved." is at the bottom.

7. Change the VPI and VCI parameters and then click the 'Finish' button

VPI: 0

VCI: 100

NetCommWireless

NF18ACV

Basic > Quick Setup > ADSL only > PPPoE Information

Enter the User ID and Password assigned to you by your Internet Service Provider (ISP).

Protocol: PPPoE
User ID: c1X0000@dsl.bizstream
Password: *****

VPI: 0
VCI: 100

Back Finish

©2017 NetComm Wireless Limited. All rights reserved.

8. After clicking finish, wait 15 seconds and check the modem lights. If the internet light does not turn green, turn your modem off and then back on again. Wait 3 minutes.
9. If you still do not get a green internet light please contact us on 0800 401 373 (Mon-Fri, 8am-8pm.)