




1. Connect to the modem via Wire or Wireless
2. Open a browser (Chrome, Firefox, Safari, etc) and enter **192.168.1.1** in the address bar, press ENTER
3. Enter **admin** as both the username and password if prompted
4. Click the **Advanced** tab on the top of the screen

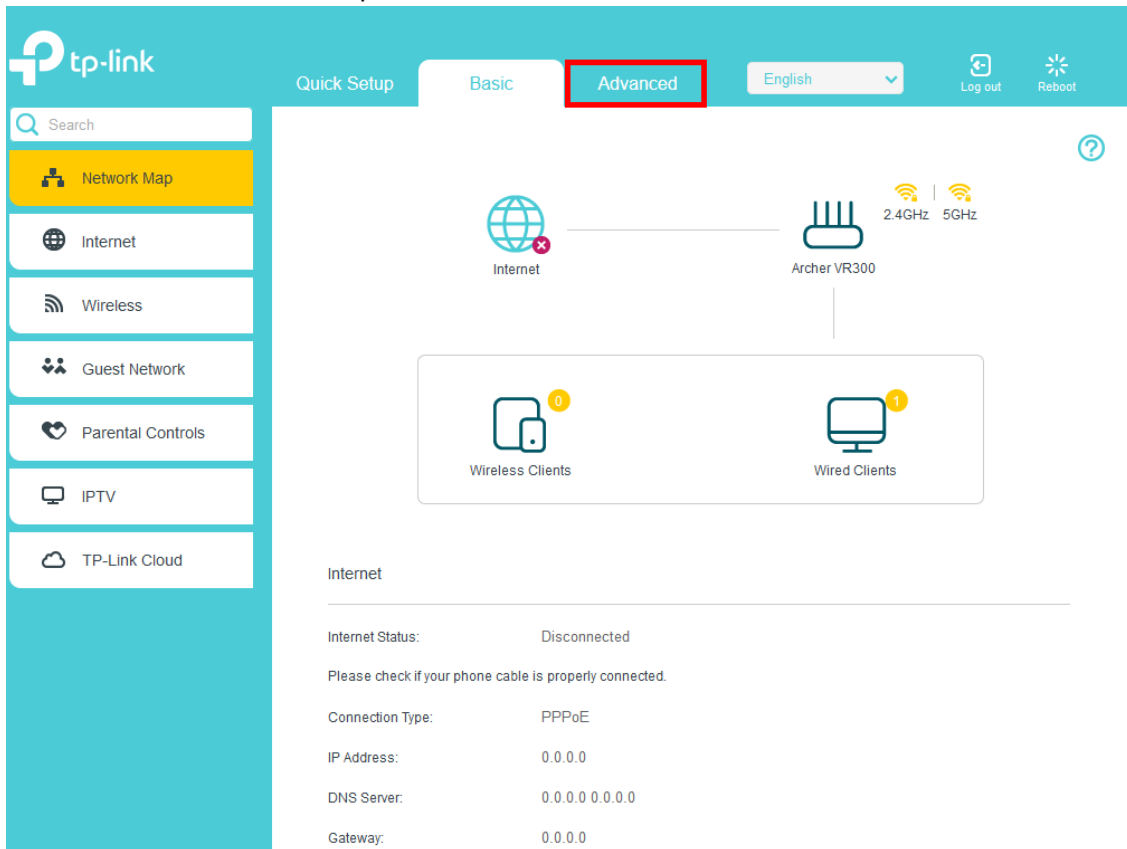

5. On the left-hand side, click **Operation Mode**
6. Make sure **DSL Modem Router Mode** is selected and then click **Save**

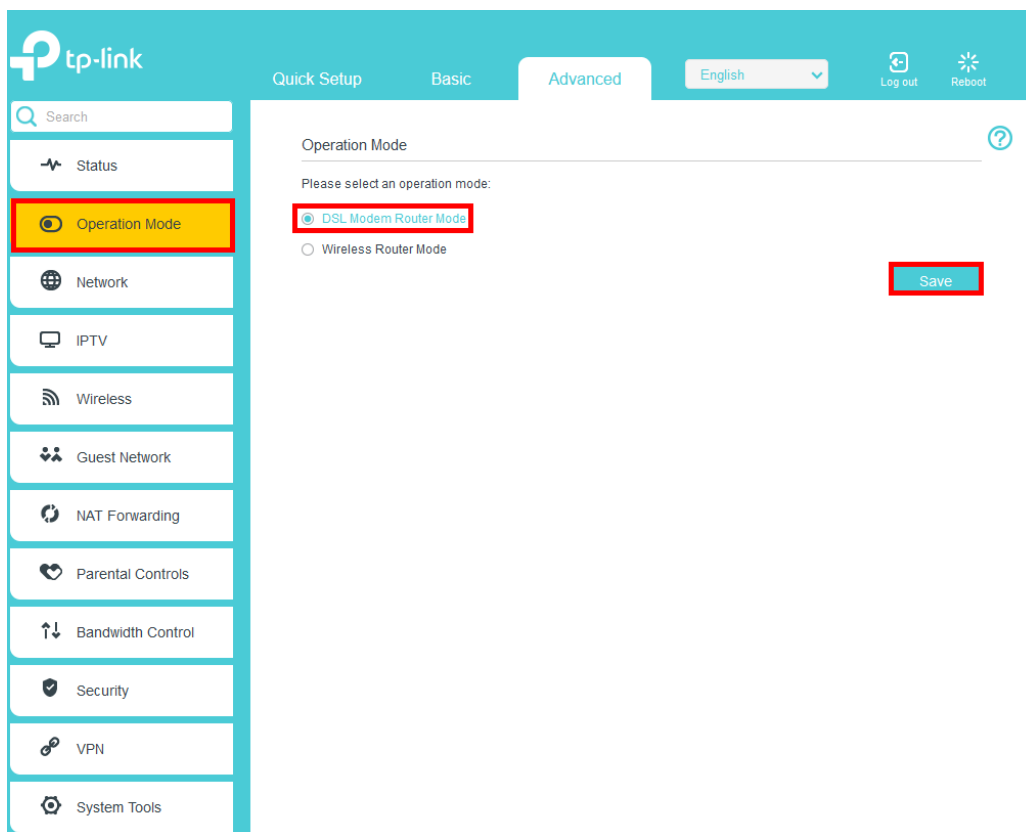

- On the left-hand side click **Network > Internet**
- Click the **Delete All** button, click **Yes** and then the **Add** button

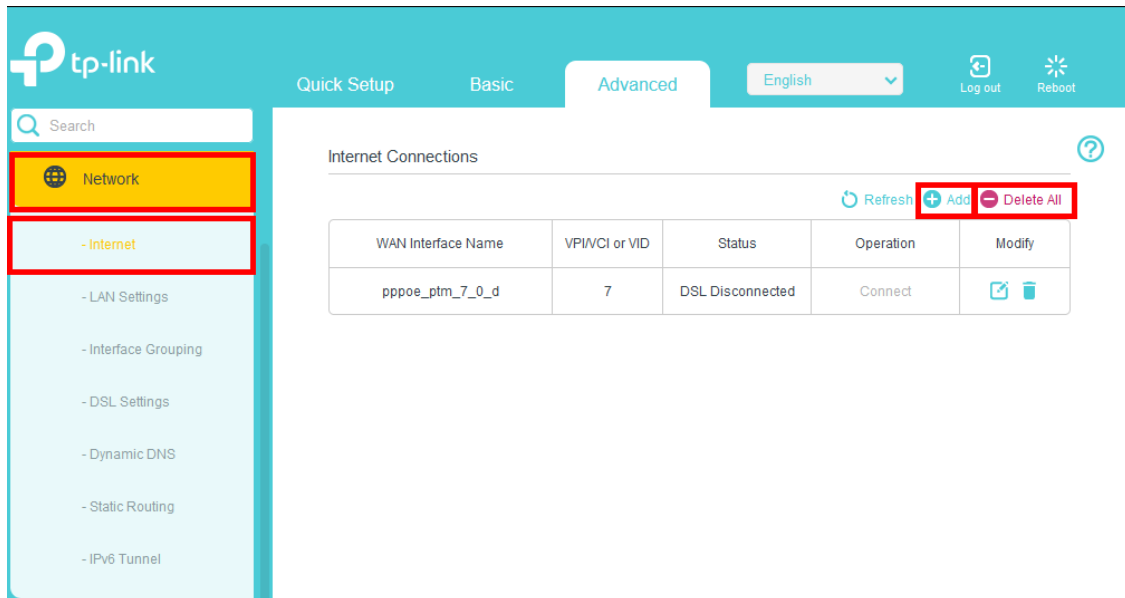

- Match the below settings

**Internet Connection Setup**

DSL Modulation Type:  VDSL  ADSL

VPI:  (0-255)

VCI:  (1-65535)

**Advanced**

Note: Do not change the parameters below unless necessary!

Encapsulation Mode:

ATM QoS Type:

PCR:  frames/s

SCR:  frames/s

MBS:  frames/s

Internet Connection Type:

Username:

Password:

Confirm Password:

Connection Mode:  Auto  On Demand  Manually

Authentication Type:

Default Gateway:

**Advanced**

MTU Size:  bytes. (The default is 1480, do not change unless necessary.)

NAT:  Enable

IGMP Proxy:  Enable

Use the IP Specified by ISP:  Enable

Echo Request Interval:  seconds. (0-120. The default value is 30.)

Use the Following DNS Addresses:  Enable

- Click **Save**