



1. Connect to the modem by Wire or Wireless
2. Open a browser (Chrome, Firefox, etc.) and enter **192.168.1.254** in the address bar
3. Enter **Admin** as the username and **@ + last 8 digits of modem S/N** as the password e.g. **@12345678**
  - The password could also be **VF-NZhg659**
4. Along the top ribbon, click **Internet**

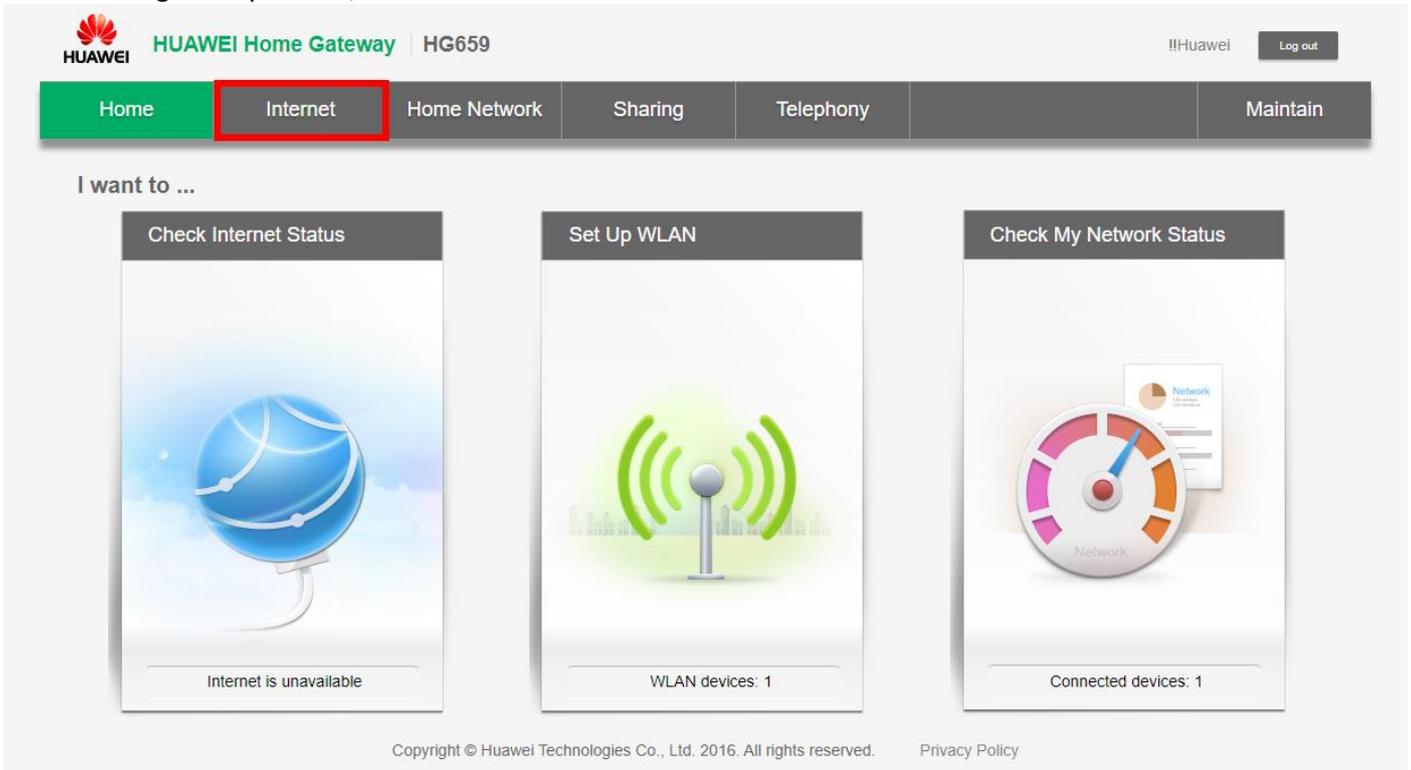

5. On the left-hand side, make sure **Internet Settings** is highlighted, look for a heading on the right-hand side with **ETH\_VID** in its name and click **Edit**

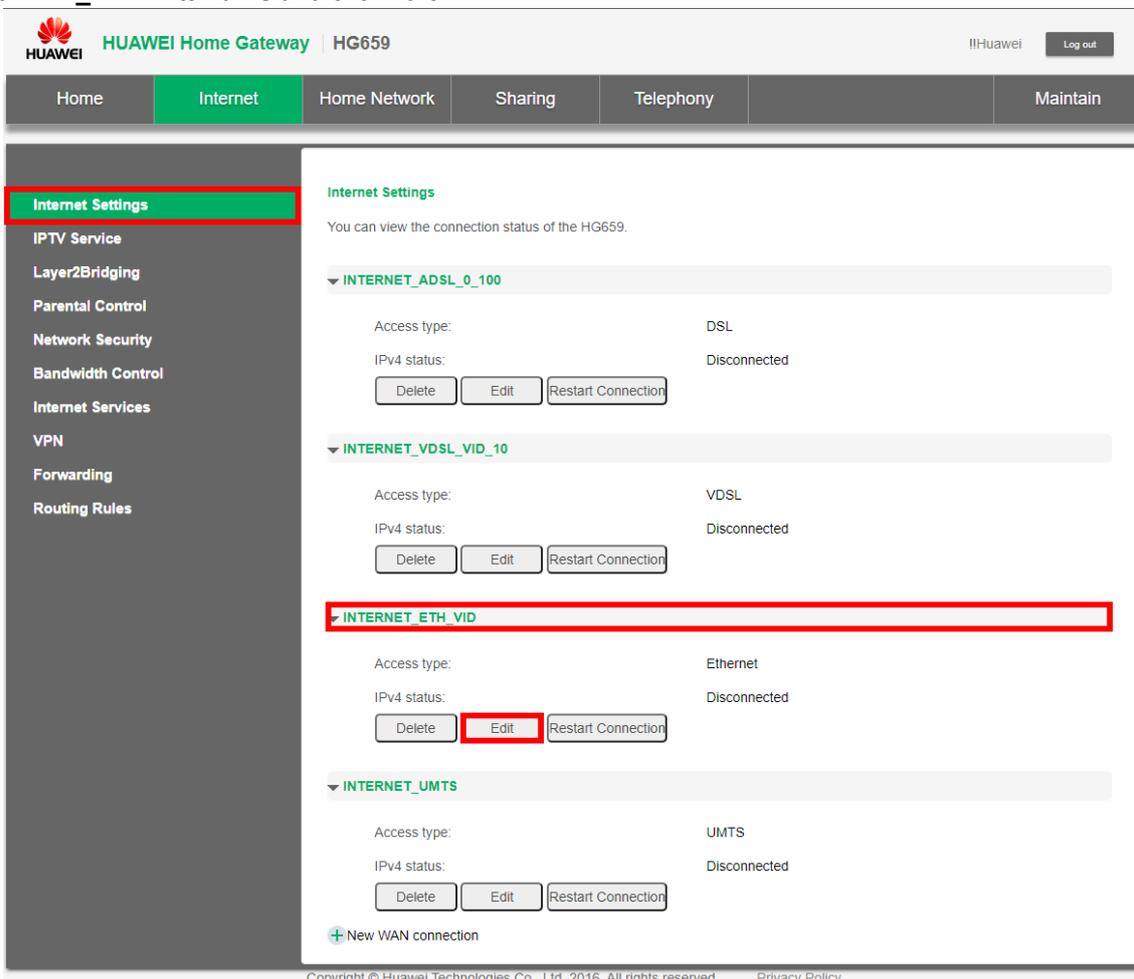

6. Make sure the following settings are in place and click **Save**

INTERNET\_ETH\_VID

Access type: Ethernet  
IPv4 status: Disconnected

Delete Edit

**Basic Information**

Enable connection:   
Name: INTERNET\_ETH\_VID  
Service type:  INTERNET  VOICE  Other  
Connection type: IP routing (IP)  
MTU: 1500  
MSS: 0  
NAT type: NAT

**Link Information**

Enable VLAN:   
VLAN ID: 10  
802.1p: 0

**IP Information**

IP protocol version: IPv4  
IPv4 addressing type: DHCP  
Static DNS:   
IPv4 primary DNS server: 8.8.8.8  
IPv4 secondary DNS server: 8.8.4.4

Cancel Save