


1. Connect to the modem by Wire or Wireless
2. Open a browser (Chrome, Firefox, etc.) and enter **192.168.1.254** in the address bar
3. Enter **!!Huawei** for the Username and **@HuaweiHgw** as the password and click Log In

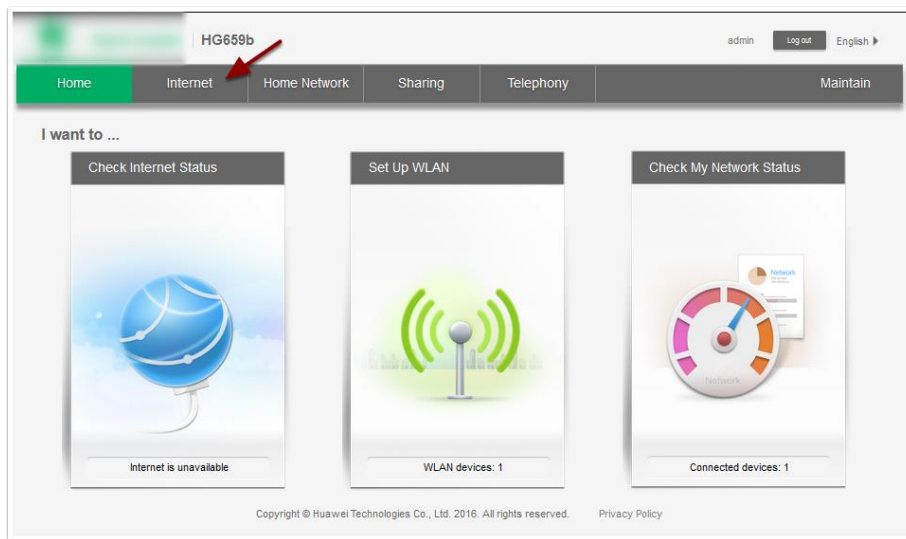

4. Along the top ribbon, click **Internet**
5. On the left-hand side, make sure **Internet Settings** is highlighted, look for a heading on the right-hand side with **ETH_VID** in its name and click **Edit**
6. Make sure the following settings are in place and click **Save**

Internet Settings

You can view the connection status of the HG659b.

INTERNET_TR069_VDSL_VID_10

Access type: VDSL
 IPv4 status: Disconnected
 IPv6 status: Disconnected
 Delete Edit Restart Connection

Basic Information
 Enable connection: ☒
 Name: INTERNET_TR069_VDSL_VID_10
 Service type: ☒ INTERNET ☒ TR069 ☒ VOICE ☐ Other
 Connection type: IP routing (PPP)
 MRU: 1492
 MSS: 0
 NAT type: NAT
Link Information
 DSL mode: ALL
 Enable VLAN: ☒
 VLAN ID: 10
 BQ2.1p: 0
PPP Information
 PPP authentication mode: Auto
 PPP trigger mode: ☒ Always online ☐ Dial manually ☐ Dial on demand
 Internet account: user@contactenergy.co.nz
 Internet password: c0nt4ct-3n3rgy!
 PPP service name:
IP Information
 IP protocol version: IPv4 + IPv6
 Static DNS: ☐
 IPv6 addressing type: DHCP
 Cancel Save